



WPD FS

FlowSensor for hot water up to 130 °C
DN 40 ... DN 300

Main Features

- Patented hydrodynamically balanced rotor
- Patented symmetrical calibration adjustment
- Hermetically sealed register (IP 68)
- Register may be rotated through 360°
- High overload capability
- Removable measuring element
- Up to 3 pulsers (1 x OD, 2 x RD) may be fitted without breaking the approval seal
- Powder coating ensures maximum corrosion protection
- Optionally as meter free of copper alloy (BMF) for aggressive media

APPLICATION

Flow sensor for heat meters for commercial and light industrial use

DN 50 to 150 for customer billing

For measurement of hot process water up to 130 °C

For high permanent flow rates such as generated by pumps, as well as for the measurement of low flow rates in off-peak periods

Installation in horizontal and vertical pipe lines

Application for aggressive media (BMF), e.g.

- Desalinated / demineralized water
- Caustic soda up to 20 %
- Saline water up to 10 %
- Chlorinated water up to 1 %
- Glycol-water solutions up to 30 %
- Caustic solutions up to pH value 9

(Other liquids on request)

Environmental Conditions

- Electromagnetic environment: Class E2
- Mechanical environment condition: Class M1
- Protection class acc. to DIN EN 60529: IP 68
- Temperature range: 10 ... 130 °C

Pattern Approval

Marking

DN 50 ...150:

DE-17-MI004-PTB002
CE M-XX* 0102

* Year of production

MATERIALS

Body	Cast iron
Measuring element	Plastic
Rotor	Plastic
We also use the following materials	Brass Stainless steel

WPD FS

FlowSensor for hot water up to 130 °C DN 40 ... DN 300

TECHNICAL DATA


Performance data WPD FS 130 °C

Nominal Diamter		DN	40	50	65	80	100	125	150	200	250	300
Q_{max}	Maximum Peak Flow once lifetime 24 h ^{max} Q or 5 min. 1.2 x Q_{max}	m ³ /h	30	30	60	90	140	200	300	500	800	1200
Q_n	Continuous Flow	m ³ /h	15	15	25	45	70	10	150	250	40	60
Q_t	Transitional Flow	m ³ /h	1.8	1.8	2.	3.2	4.	0	12	20	0	0
Q_{min}	Minimum Flow	m ³ /h	0.6	0.6	0	1.4	8	8.0	4.5	8	45	50
	Staring Flow	m ³ /h	0.25	0.25	1.	0.35	2.	3.5	1.7	2.0	20	25


Performance data table according to DIN EN 1434

Nominal Diamter		DN	50	65	80	100	125	150
q_s	Overload Flowrate	m ³ /h	30	50	80	100	200	300
q_p	Continuous Flow horizontal	h	15	25	40	12	100	150
q_{ih}	Minimum Flow horizontal	m ³ /h	0.	1	1.	0	4	6
q_{iv}	Minimum Flow vertical	h	6	2.	6	60	10	15
q_p/q_i	Ratio horizontal	m ³ /h	1.	5	4	2.4	25	25
q_p/q_i	Ratio vertical	h	5	25	25	6	10	10

Typical Head Loss Curve

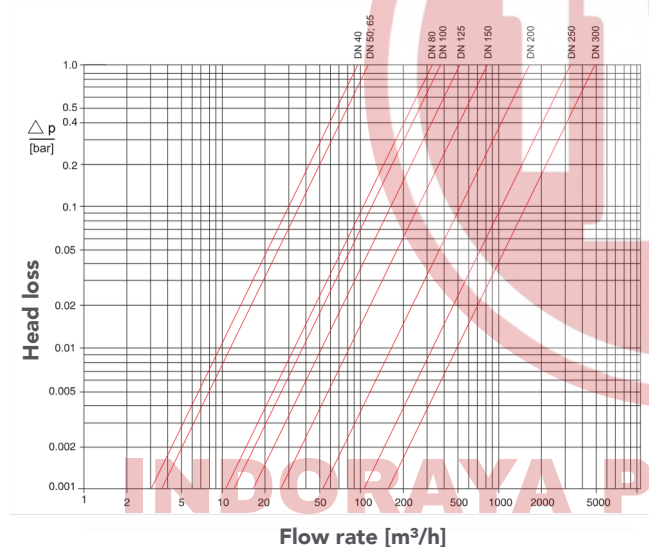

Typical Accuracy Curve

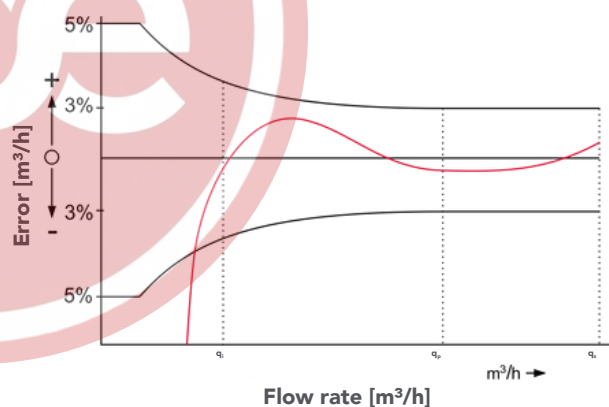


q_s = maximum peak flow


q_p = continuous flow $\pm 2\%$

q_i = minimum flow $\pm 5\%$

Dials



DN 40 ... DN 125



DN 150 ... DN 300

Nominal Diameter DN	Smallest reading m ³	Max. reading m ³
40... 125	0.0005	1 000 000
150... 300	0.005	10 000 000

WPD FS

FlowSensor for hot water up to 130 °C DN 40 ... DN 300


PULSE VALUES

Pulser		pulse value	
		DN 50 ... DN 100	DN 150 ... DN 300
RD02 / RD022		0.25 and 0.1 m³ or 0.25 and 0.025 m³	1 and 2.5 m³ or 2.5 and 0.25 m³
OD 02		0.001 m³	0.01 m³
OD 04		0.01 m³	0.1 m³

DIMENSIONS AND WEIGHTS

Nominal Diameter			DN	40	50	50	65	65	80	80	100	100	125	150	150	200	250	300
Weights Dimensions	overall length	L	mm	220	200	270	200	300	225	300	250	360	250	300	500	350	450	500
	height	*)	mm	120	120	120	120	120	150	150	150	150	160	177	177	206	231	256
		H	mm	69	73	73	85	85	95	95	105	105	118	135	135	162	194	226
		h	mm	200	200	200	200	200	270	270	270	270	280	356	356	441	466	491
	meter	g	kg	7.4	7.7	9.5	10.0	11.9	14.	16.1	18.	20.	20.5	35.5	43.8	50.	72.	99.
	measuring element		kg	1.4	1.4	1.4	1.4	1.4	0	3.0	0	0	3.0	5.5	5.5	5	3	3
body			kg	6.0	6.3	8.1	8.6	10.5	3.0	13.1	3.0	3.0	17.5	30.0	38.3	7.5	7.5	7.5
									11.		15.	17.				43.	71.	91.
*) Other overall lengths on request									0		0	0				0	3	8

Dimensional diagram

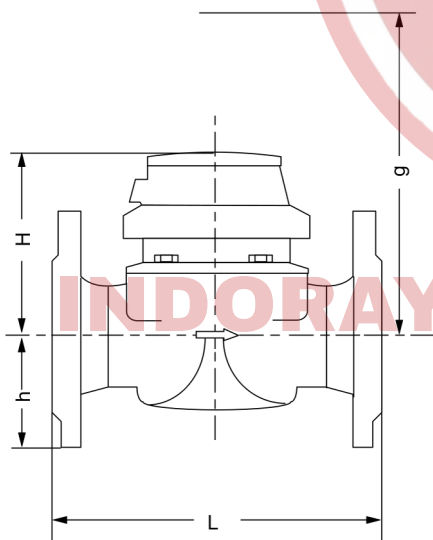

INSTALLATION

Pipe

horizontal
vertical

Meter head

upwards
sideways

Installation Requirements

- Unrestricted straight pipe upstream of the meter 3 x DN
- No abrupt restrictions directly behind the meter

AVAILABLE VARIANTS

Diameter		DN	40	50	65	80	100	125	150	20	250	30
Nominal	Overall	mm	220	200	200	22	250	250	300	0	450	0
length	Overall	mm	...	270	300	5	360	...	500	35	...	50
length						30				0		0
						0				...		...

WPD FS

FlowSensorfor hot water up to 130 °C DN 40 ... DN 300

Order Example

	Type
	Nominal
	Diameter
	Temperature
	Pressure rate
WPD FS, DN 50, 130/16, L = 200 mm, 0,25/0.1 m ³	Overall length
drilled acc. to EN 1092 PN 16	Pulse values
	Flange drilling



INDORAYA POWER ENERGI



Xylem.com | Sensus.com

UK & Ireland Inquiries | Sensus UK Systems Ltd. | +44 1256 372800 | SensusUK.Orders@xylem.com

International Inquiries | Sensus GmbH Hannover | Meineckestr. 10 | 30880 Laatzen | Germany | +49 5102 743177
info.int@xylem.com

©2020 Sensus. All products purchased and services performed are subject to Sensus' terms of sale, available at sensus.com. Sensus reserves the right to modify these terms and conditions in its own discretion. The Sensus logo and other Sensus products or services referenced are registered trademarks of Sensus.

This document is for informational purposes only, and SENSUS MAKES NO EXPRESS WARRANTIES IN THIS DOCUMENT. FURTHERMORE, THERE ARE NO IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES AS TO FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY. ANY USE OF THE PRODUCTS THAT IS NOT SPECIFICALLY PERMITTED HEREIN IS PROHIBITED.



ISO 9001:2015 No. 03496/0